

FDEx2i

ALL ENCOMPASSING TEMPERATURE CONTROLLER WITH BUILT-IN CONNECTIVITY AND TRACKING

DESCRIPTION

The FDEx2i provides accurate temperature control with advanced defrost and energy-saving abilities as well as the ability to monitor cooler sales and performance data on the online portal without the need for a member of staff to visit the cooler.

The FDEx2i delivers flexibility and complete management of the cooler to ensure operations can match store requirements with control of up to 3 outputs (depending on the model) and 3 input sensors of temperatures and door as well as over 100 configurable parameters and is HC compatible.

The FDEx2i provides remote monitoring, configuration and asset location via the online portal and/or phone application. Data from the FDEx2i can be used for sales/customer insights as well as health monitoring and early fault detection to reduce cooler downtime. Service personnel can also remotely configure and update the FDEx2i to always ensure precise control and operation. In the event of a theft or unauthorised movement, the controller functionality can be disabled until the cooler has been successfully located and recovered.

The FDEx2i is small, compact, and fully encompassing, including the GSM antenna allowing simple and discrete mounting anywhere in the cooler and can be connected to an external display for live temperature reading, status, alarms, and parameter configuration.

FEATURES

- GSM Connectivity Options for Secure Data Transmission to the Online Portal for Remote Monitoring
- Internal Cellular Antenna
- Bluetooth (BLE) for Remote Monitoring and Configuration of Status and Parameters via the Sollatek Smart Device App
- Connects to a BLE and Wi-Fi Camera for Stock and Purity Monitoring
- Proximity Marketing through iBeacon and Eddystone Beacons
- Geo-Location via Wi-Fi Sniffing or External GNSS (GPS) Module
- Electronic Temperature Controller for Coolers, Fridges, and Freezers
- Energy Saving via the Door Switch
- Time and/or Temperature Controlled Defrost with Advanced Features
- Controls up to 3 Outputs including Compressor, Fans, Lights, and Heater
- Two External Inputs for Temperature Probes and Door Switch
- Connects to an External Display for Live Status, Temperature, and Parameter Configuration
- Rechargeable Battery for Location Transmission When Mains Is OFF
- Battery Overcharge and Battery Temperature Protection
- 4 Months of Battery Autonomy Depending on Set Transmission Interval



FEATURES



OPTIONS



FEATURES/FUNCTION (CONTINUED)

- Transmission Interval Customisable to Match Requirement
- On-Board Accelerometer for Movement Detection
- Embedded Flash Memory for Data or Image Storing between Transmissions
- Zero Voltage Crossing Switching for Long Relay Life
- Complete Voltage Protection (High/Low, Spike/Surge Protection)
- Intelligent Time Delays for Compressor OFF Periods including Brownouts
- TIMESAVE™ Function - Voltage Sensing Period before Reconnecting Supply after a Bad Voltage Disconnection
- 4 LEDs for Status Indication
- Programmable via SPP02 Programmer Device for Factory and In-The-Field Upgrades
- Hydrocarbon Refrigerants Compatible
- Encapsulated for Maximum Environmental Protection

Display Compatibility

The FDEx2i can be connected to a Sollatek display:


FDM4 / FDM4-S
(H) 30 mm



FDM5 / FDM5-S
(H) 50 mm



SYSTEM DIAGRAM

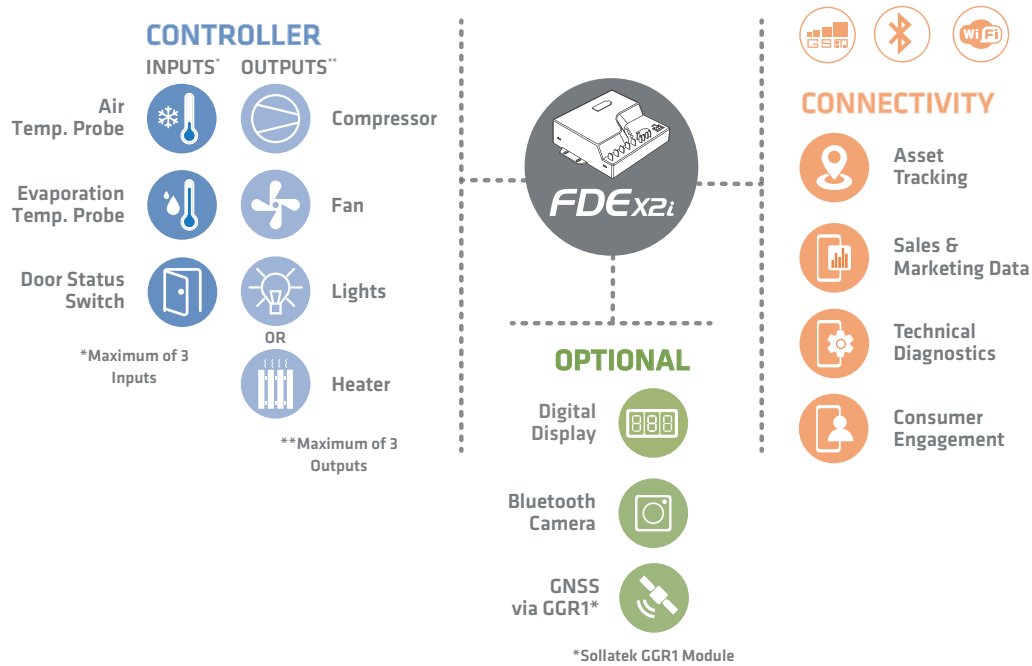

SPECIFICATIONS

REFRIGERATION CONTROL										
Temperature Control Method	Air or Evaporator									
Temperature Control Range	-40°C to +70°C (-40°F to +158°F)									
Temperature Time Delay	1 - 255 s									
Defrost Control	Timed, Active or Manual (via a display)									
Advanced Defrost Mode	Pre and Post Defrost, Emergency Defrost									
Energy Saving	Temperature Set-back, Fan Cycling, Lights OFF									
Input Type (Max 3)	Temperature Sensor & Door Switch									
Temperature Probe Type	100 KΩ NTC (β _{25/50} : 3990 k)									
Output Control	Compressor, Lights, Evaporator Fan, Reverse Fan or Heater									
Model Variants (Max 3)	<table border="1"> <thead> <tr> <th>FDE12</th> <th>FDE22</th> <th>FDE32</th> </tr> </thead> <tbody> <tr> <td>Compressor only</td> <td>Compressor & Fan</td> <td>Compressor, Fan & Lights</td> </tr> <tr> <td colspan="2">IEC 60730</td> <td>UL 60730</td> </tr> </tbody> </table>	FDE12	FDE22	FDE32	Compressor only	Compressor & Fan	Compressor, Fan & Lights	IEC 60730		UL 60730
FDE12	FDE22	FDE32								
Compressor only	Compressor & Fan	Compressor, Fan & Lights								
IEC 60730		UL 60730								
Compressor Relay	<table border="1"> <tbody> <tr> <td>16 A 250 V, 100K Cycles</td> <td>Motor Load 115 VAC, 16 FLA, 72 LRA, 30K Cycles</td> </tr> <tr> <td></td> <td>Motor Load 230 VAC, 10 FLA, 60 LRA, 30K Cycles</td> </tr> </tbody> </table>	16 A 250 V, 100K Cycles	Motor Load 115 VAC, 16 FLA, 72 LRA, 30K Cycles		Motor Load 230 VAC, 10 FLA, 60 LRA, 30K Cycles					
16 A 250 V, 100K Cycles	Motor Load 115 VAC, 16 FLA, 72 LRA, 30K Cycles									
	Motor Load 230 VAC, 10 FLA, 60 LRA, 30K Cycles									
Fan Relay	<table border="1"> <tbody> <tr> <td>5 A, 250 V, 50K Cycles</td> <td>1.5 FLA, 9 LRA, 30K Cycles</td> </tr> </tbody> </table>	5 A, 250 V, 50K Cycles	1.5 FLA, 9 LRA, 30K Cycles							
5 A, 250 V, 50K Cycles	1.5 FLA, 9 LRA, 30K Cycles									
Aux (light/heater)	<table border="1"> <tbody> <tr> <td>5 A, 250 V, 50K Cycles</td> <td>1.5 FLA, 9 LRA, 30K Cycles</td> </tr> </tbody> </table>	5 A, 250 V, 50K Cycles	1.5 FLA, 9 LRA, 30K Cycles							
5 A, 250 V, 50K Cycles	1.5 FLA, 9 LRA, 30K Cycles									
Maximum Total Current Rating	<table border="1"> <tbody> <tr> <td>16 A</td> <td>18 A</td> <td>18 A</td> </tr> </tbody> </table>	16 A	18 A	18 A						
16 A	18 A	18 A								
Intelligent Time Delay	0 - 600 s									
Refrigerant Compatibility	CO ₂ & Hydrocarbon									



SPECIFICATIONS (CONTINUED)


POWER & VOLTAGE PROTECTION	
Nominal Voltage	115 V or 230 V
Withstand Voltage	Up to 415 V AC
Working Frequency	Auto-sense 45 - 60 Hz
Type of Protection	High / Low, Spike / Surge & Frequency
High / Low Voltage Blind Time	0 - 255 s
Surge Protection	6.5 kA, <10 ns, 160 J
Over Voltage Category	Category II
CELLULAR CONNECTIVITY	
Target Region	Global
Antenna	Internal
Type	2G LTE
Category	EDGE, GSM, GPRS Cat-M1, Cat-NB1
Frequency Band	850 / 900 / 1800 / 1900 B1, B2, B3, B4, B5, B8, B12, B13, B18, B19, B20, B25, B28, B39
BLUETOOTH CONNECTIVITY	
Type/version	BLE 5.4
RF Power Output	-20 dBm to +4 dBm
Frequency	2.4 GHz ISM
Connectivity	Eddystone, iBeacon & connection to the Sollatek Smart Device Application
Bluetooth Standard	IEEE 802.15.1
Memory Size	32 Mb for data/image storing between transmission
WI-FI GEO-LOCATION	
Frequency Range	2.4 GHz
Protocol	802.11 b/g/n
ACCELEROMETER	
Measurement Direction	3-axis
Measurement Scale	High Sensitivity ±2g
BATTERY	
Battery Type	Rechargeable Lithium Polymer
Nominal Voltage	3.7 V
Capacity	700 mAh
Typical Run Time	Approx. 4 months (depending on set transmission frequency)
USER INTERFACE	
LEDs	1 x Controller Status ; 1 x Battery Status ; 2 x GSM Status
Display (Optional)	Connects to the FDM4 & FDM5 Display Range
CONNECTOR / INTERFACE	
Input Connector	1 pair of 0.11" (2.80 mm) Faston Tabs, 1 triple 0.11" (2.80 mm) Faston Tabs
Output Connector	Up to 5 x 0.25" (6.35 mm) Faston Tabs (depending on model)
External Device Connector	6-way (3x2) Female Connector Block
Data / Programming	Micro USB-B for Programming
Sim Card	Push-Push Micro SIM holder
ENVIRONMENTAL	
IP Rating	IP20 Electronics: IP65 (PCB encapsulated)
Operating Temperature	-10°C to +60°C (+14°F to +140°F)
Operating Humidity	<90% RH non-condensing
Shipping/Storage Temperature	-10°C to +60°C (+14°F to +140°F)
Battery Charging Temperature	0°C to +45°C (32°F to +113°F)
CERTIFICATION / STANDARDS	
Product Certification	CE, IEC60730-1, IEC60730-2-9, EN60079-15, CSA 60730-1, FCC, UKCA
Flammability	UL94 V-0 @ 1.5 mm, GWFI: 960 °C, GWIT: 850 °C
EMC	Per EN 301 489-1, EN 301 489-7, EN 301 489-17
Pollution Degree	2
Disconnection Type	Type 1.B



SPECIFICATIONS (CONTINUED)

MECHANICAL	
Mounting	4 x M4 self-tapping pozidriv screws
Unit Dimensions	112.0 x 89.0 x 31.9 mm
Unit Weight	Approx. 210 g
PACKING	
Carton Dimensions (L x W x H)	510 x 560 x 250 mm
Carton Quantity	1 carton (100 units)
Pallet Dimensions (L x W x H)	1200 x 1020 x 2150 mm
Pallet Quantity	30 cartons (3000 units per pallet)

DIMENSIONAL DRAWING

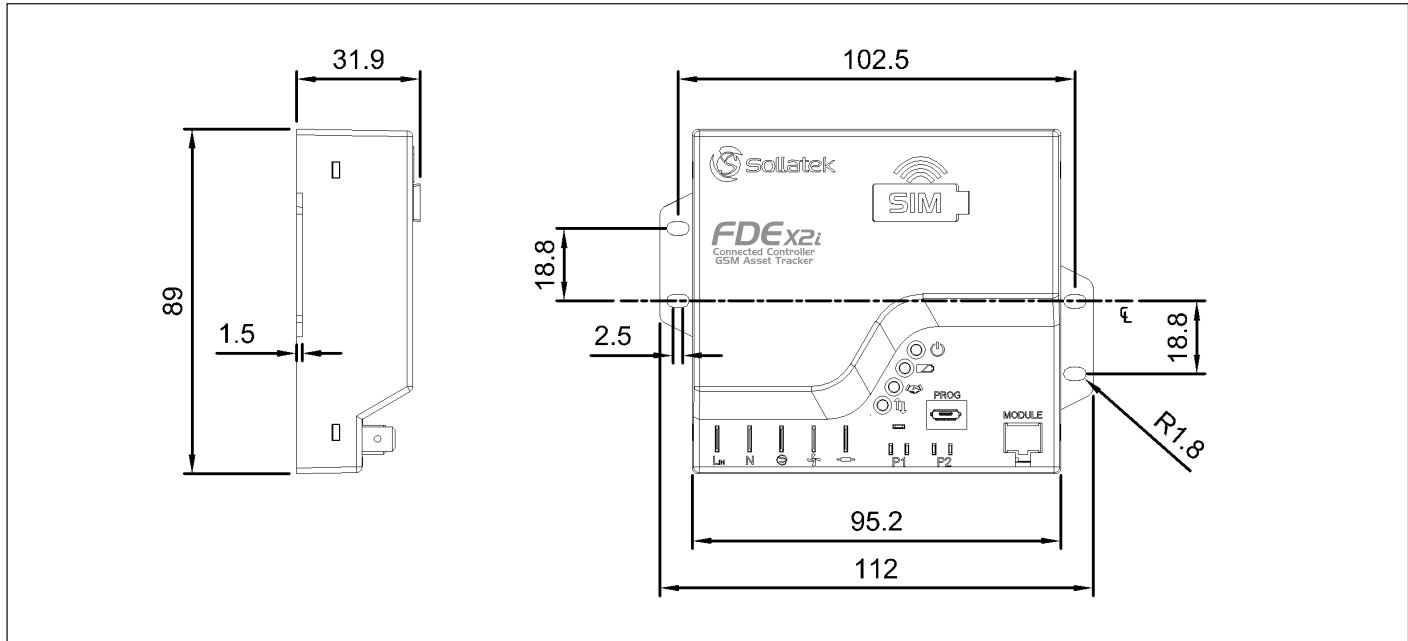

PRODUCT CODE	DESCRIPTION
<i>Sollatek Portal</i>	
9235222S	FDE22-2BW 2xOP 2G+BLE+Batt+WiFi
9235322S	FDE32-2BW 3xOP 2G+BLE+Batt+WiFi
92353223	FDE32-2BW3 3xOP 2G+BLE+Batt+WiFi+GPS-Ready
9235224S	FDE22-4BW 2xOP 4G+BLE+Batt+WiFi
9235324S	FDE32-4BW 3xOP 4G+BLE+Batt+WiFi
92353243	FDE32-4BW3 3xOP 4G 3V3 Sol
92353244	FDE32-4BW3 3xOP 4G 3V3 Sol No SIM
92353224	FDE32-2BW3 3xOP 2G 3V3 Sol No SIM

<i>Non-Sollatek Portal</i>	
92352220	FDE22-2BW 2xOP 2G+BLE+Batt+WiFi
92353220	FDE32-2BW 3xOP 2G+BLE+Batt+WiFi
92352240	FDE22-4BW 2xOP 4G+BLE+Batt+WiFi
92353240	FDE32-4BW 3xOP 4G+BLE+Batt+WiFi

SOLLATEK (UK) LIMITED
 Sollatek House, Waterside
 Drive, Langley, Slough SL3 6EZ,
 United Kingdom
 Tel: +44 (1753) 214 500
 Email: sales@sollatek.com
 Web: www.sollatek.com

ISO9001: 2015 accredited company
 All weights and dimensions are
 approximate. Specifications are subject
 to change without prior notice. ©Sollatek
 (UK) Limited 2024. All Rights Reserved.
 SOLLATEK and the SOLLATEK device are
 the trade marks of the Sollatek group of
 companies.

